


**FIMAC S.p.A.**

# MED Shut-Off Valve

This MED Shut-Off Valve is a spring loaded, solenoid operated, three-way, two-position directional selection valve provided with electrical indication of the energized condition.

**Hydraulic &  
Pneumatic  
Equipment**

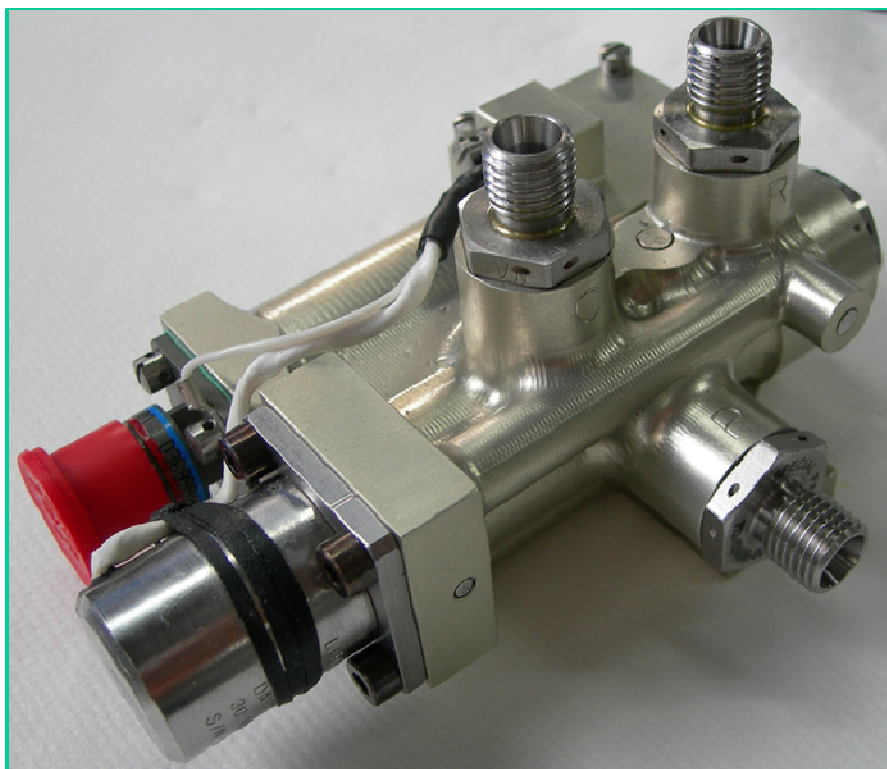

## TECHNICAL DATA:

Operating Temperature:	-55°C +70°C
Operating Fluid:	Skydrol
Operating Pressure:	3000 psi (207 bar)
Unit Weight:	0.6 kg
Operating Voltage:	28 Vdc
Employed On:	Gulfstream G280



Via Piemonte, 19  
20030 SENAGO (Milano)  
Italy

[www.fimac.aero](http://www.fimac.aero)

Tel.: +39 0299010754

Fax: +39 0299010759

e-mail: [fimac@fimac.aero](mailto:fimac@fimac.aero)