


**FIMAC S.p.A.**

# MED Shut-Off Valve

This MED Shut-Off Valve is a spring loaded, solenoid operated, three-way, two-position directional selection valve provided with electrical indication of the energized condition.

**Hydraulic &  
Pneumatic  
Equipment**

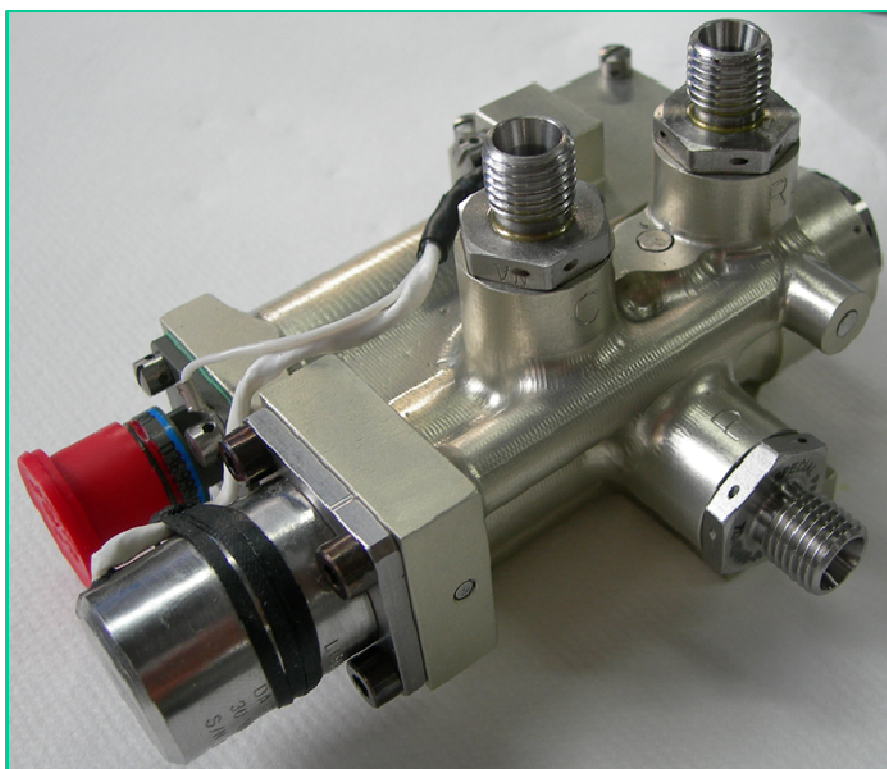

Via Piemonte, 19  
20030 SENAGO (Milano)  
Italy

[www.fimac.aero](http://www.fimac.aero)

Tel.: +39 0299010754

Fax: +39 0299010759

e-mail: [fimac@fimac.aero](mailto:fimac@fimac.aero)

## **TECHNICAL DATA:**

|                        |                    |
|------------------------|--------------------|
| Operating Temperature: | -55°C +70°C        |
| Operating Fluid:       | Skydrol            |
| Operating Pressure:    | 3000 psi (207 bar) |
| Unit Weight:           | 0.6 kg             |
| Operating Voltage:     | 28 Vdc             |
| Employed On:           | Gulfstream G280    |