


**FIMAC S.p.A.**

# Hydraulic Shut-Off Valve

3-way, 2-position spring biased Solenoid Operated Hydraulic Selector valve.  
One-piece aluminum alloy manifold design.  
Electrical actuation by means of a Solenoid Pilot Valve.  
Low leakage, spool actuated internal shut-off valve to limit the internal leaks.

**Hydraulic &  
Pneumatic  
Equipment**

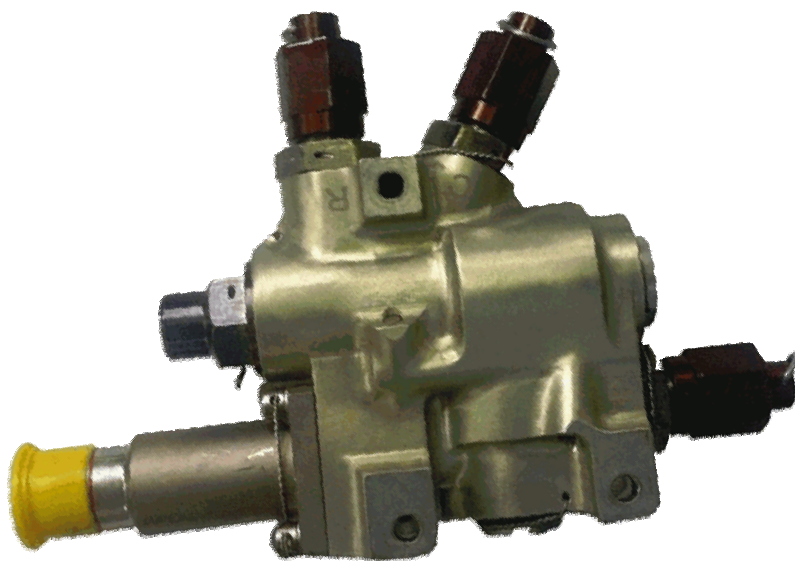

## **TECHNICAL DATA:**

Operating Temperature:	-54°C +85°C
Fluid Temperature:	-54°C +135°C
Operating Fluid:	MIL-H-5606
Leak Rate (P to R):	Max 2 drops/min
Operating Pressure:	3000 psi (207 bar)
Unit Weight:	0.63 kg
Leak Rate (P to R):	Max 2 drops/min
Employed On:	UAV



Via Piemonte, 19  
20030 SENAGO (Milano)  
Italy

[www.fimac.aero](http://www.fimac.aero)

Tel.: +39 0299010754

Fax: +39 0299010759

e-mail: [fimac@fimac.aero](mailto:fimac@fimac.aero)