


FIMAC S.p.A.

Integrated Auxiliary Power Unit and Cooling System

Diesel Auxiliary Electric Power Generator
and Cooling System for a Tank
Ammunition and Crew compartments.

**Environmental
Control
Systems**

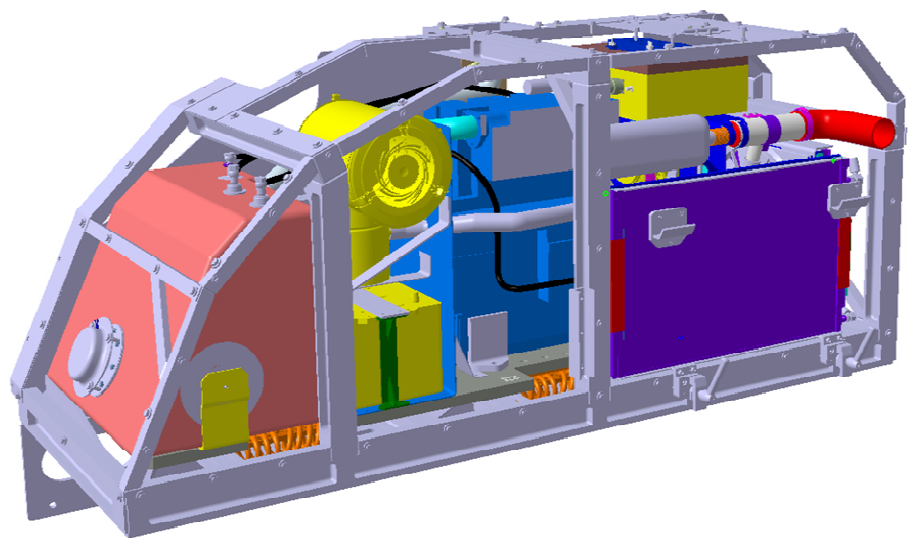

TECHNICAL DATA:

Operative Temperature:	-32°C +49°C
Storage temperature:	-40°C +63°C
Fuel:	Diesel NATO F34
Electrical Generation:	350 A @ 28 Vdc
Cooling capacity :	7 kW
Air Flow:	300 kg/h
Applicable Standards:	MIL-STD 810G, MIL-STD 461, Stanag 2895
Employed on:	PZH 2000 Tank



Via Piemonte, 19
20030 SENAGO (Milano)
Italy

www.fimac.aero

Tel.: +39 0299010754
Fax: +39 0299010759

e-mail: fimac@fimac.aero